

MU-COLLECT Vario

MU-COLLECT Vario Hydro

PROFESSIONAL MULCHING TECHNOLOGY AND COMPLETELY TIDY SURFACES


- Both are possible: An optimal mulching result or a completely tidy surface
- Whether you are operating a large mower or compact tractor, the MU-COLLECT is able to discharge to the centre or to the right, and features mechanical or hydraulic drive
- A feeder auger ensures reliable operation even under high throughput levels of plant material
- The MU-Vario® system equipped as standard ensures perfect shredding and increases the loading capacity
- Optimal accessibility for fast conversion from collecting to mulching function
- A special delivery chute prevents blockages due to material backup or full containers
- A proven tool for any task, the carbide M-shackle flail



Driving power in HP:



Hydraulic motor l/min:



Working width in metres:



MULCH OR COLLECT - DECIDE WHEN YOU GET THERE




Both mechanical and hydraulic drive are possible, optimised for the vehicle.



Cat. 0 coupling triangle

Cat.1 coupling triangle


Mounting console for support arms

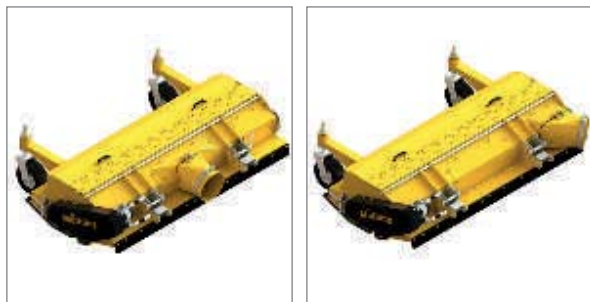

Vehicle-specific discharge centrally or to the right (in direction of driving).



MU-Vario® for an optimised intake and housing form and continuously variable adjustable shredding rates, ensuring ideal mulch quality and shredding performance.

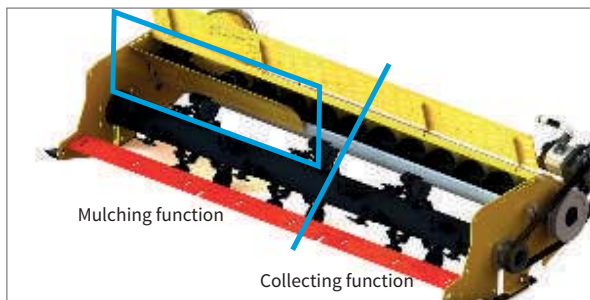

Mulching function

Collecting function

The discharge plate is used to switch from the collecting to the mulching function.



V-belt for reliable power transmission and overload protection.

Technical Specifications

MU-COLLECT Vario MU-Collect Vario Hydro	140	160
Working width (cm)	140	160
Total width (cm)	162	182
Max. tractor HP 2200 rpm	40	40
Weight (kg)	223	244
Number of carbide M-shackle flails	24	28
Oil volume, l/min	35-70	45-70



Scarifying blades cut up and aerate the matted layer in the root crown area to improve the soil structure in the long term (optional).